

# QUICK CONNECT GUIDE

## How to set up your HYBRID FIBRE INTERNET

### PREMIUM WI-FI 6 BEACON & HIGH SPEED MODEM

#### WI-FI NETWORK CREDENTIALS:

Your Network name is Execulink plus the last 4 digits of the serial number. Your Network password is located on the bottom of the Router, labeled WiFi Key.

**NEED HELP?** Visit us at [execulink.ca/support](http://execulink.ca/support)  
For Wi-Fi troubleshooting try our app, Execulink Helps.

## STEP 1: DOUBLE CHECK

Make sure you have the following components available to connect to the Internet.

Premium Wi-Fi 6 Beacon & Power Adapter



High Speed Modem & Power Adapter



NOTE: You will have either the Hitron CODA-45 or the CODA-4589 modem with minor differences in setup.



Ethernet Cables (x2)




Coaxial Cable

Included with new installations.




## STEP 2: CONNECT THE COAXIAL CABLE

1. Make sure all equipment is unplugged.
2. Connect the coaxial cable to the coaxial port on the back of the modem and turn the screw on the end of the cable until it is tightly connected.
3. If not already done so, connect the other end of the coaxial cable to a wall outlet. Again, thread the screw on the end of the cable until it is tight. This step may have been completed already by your installer.

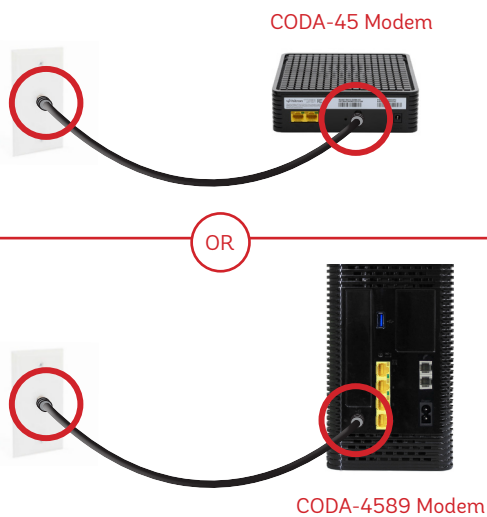

## STEP 3: CONNECT THE MODEM & BEACON


1. Place your Beacon within reach of the modem.
2. Connect one end of an Ethernet cable to a WAN/LAN port on the Beacon and the other end to the LAN1 Ethernet port on the CODA-45 modem or the LAN4 port on the CODA-4589.

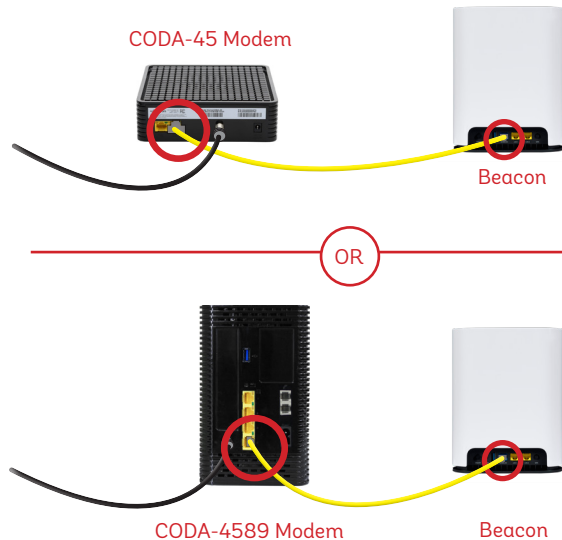

## STEP 4: POWER ON DEVICES

1. Plug in the power adapter to the modem and the other end into the wall socket. The modem's power light should turn on.
2. Plug in the Beacon's power adapter and push the ON/OFF switch to ON and allow the router to boot up.
3. After several minutes the LED on the front will be solid blue-green to indicate that it is ready.

To customize your wireless settings including password, network names and more, please download the Nokia Wi-Fi App or visit [execulink.ca/myexeculink](http://execulink.ca/myexeculink).

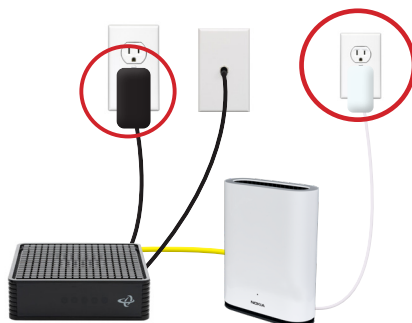


## OPTIONAL: DOWNLOAD NOKIA WI-FI APP

Using your mobile device, go to the Google Play or App Store to download the Nokia WiFi app on your Android or iOS device.

The Nokia WiFi app will allow you to manage all of your Wi-Fi devices and settings such as your, password, SSID, guest network, parental controls, and much more.

In the Nokia app, choose the "Get Started" option to begin setup.

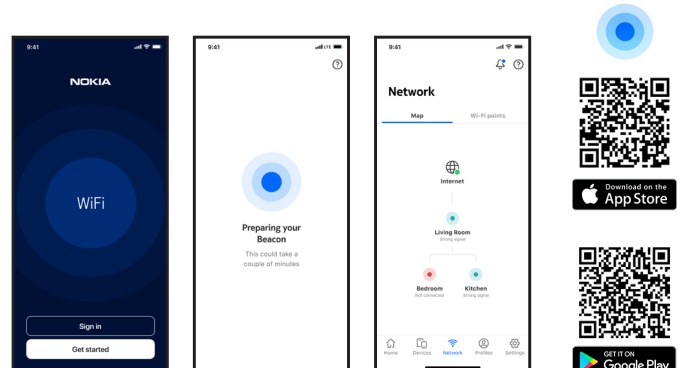

**NEED HELP?**

CALL 1.877.393.2854  
VISIT [SUPPORT.EXECULINK.CA](http://SUPPORT.EXECULINK.CA)

# QUICK CONNECT GUIDE

## How to set up your HYBRID FIBRE PHONE

Only complete these steps after your Phone service has been activated. Your activation date is provided by an Execulink representative.

NEED HELP? Visit us at [execulink.ca/support](http://execulink.ca/support) or call Customer Care at 1.877.393.2854.

### STEP 2: CONNECT COAXIAL CABLE

1. Make sure all equipment is unplugged.
2. Connect the coaxial cable to the coaxial port on the back of the ATA and turn the screw on the end of the cable until it is tightly connected.
3. If not already done so, connect the other end of the coaxial cable to a wall outlet. Again, thread the screw on the end of the cable until it is tight. This step may have been completed already by your installer.



### STEP 4: CONNECT TO PHONE

1. Plug your telephone cord into the Phone 1 port on the back of the ATA and the other end into your phone.
2. If you use a cordless telephone, please ensure the cordless base station's power adapter is also plugged into a working electrical outlet.
3. The phone indicator light on top of the ATA should be lighting up green. Pick up your phone and check for a dial tone and make an outgoing call to test.



### STEP 1: DOUBLE CHECK

Make sure you have the following components in your Hybrid Fibre Phone package.

Arris ATA & Power Adapter



Telephone Cable




Coaxial Cable

Included with new installations.



### STEP 3: POWER UP ATA

1. Plug in the ATA's power adapter into the back of the ATA and the other end into a wall outlet.

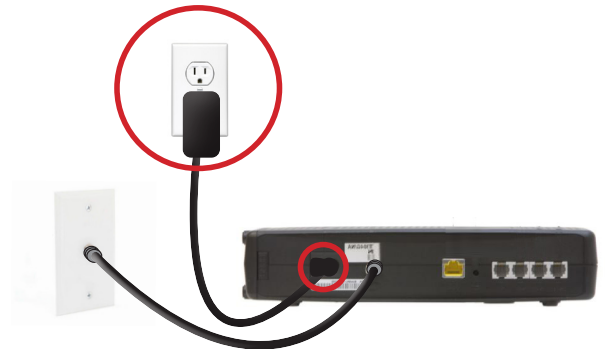

### STEP 5: FINAL STEPS & SETUP

If you are keeping your phone number, call our Customer Care team at 1-877-393-2854 to port your number.

If you are using a new phone number, congratulations— your new phone is ready for use!

